



GETRA[®]

Miscellaneous

Sterilization & Disinfection Cabinet, Sushi Processing Eqp,
Oil Filter, Refractometer, Digital Scale, Kitchen Waste Pro-
cessor, Flexible Motorized Roller Conveyor, Truck Loading
Conveyor

Oil Filter

Mesin ini berfungsi untuk membersihkan/menyaring minyak goreng agar masa pakainya menjadi lebih tahan lama hingga 3 ~ 5 kali. Selain itu kualitas dan penampilan makanan pun menjadi lebih baik. Mesin ini menggunakan compound dan filter paper dalam pemakaiannya. Compound berguna untuk menyerap kandungan asam lemak, peroksida dan polymer di dalam minyak, sedangkan filter paper digunakan untuk memisahkan minyak dari kotoran dengan ukuran > 5 mikron. Minyak yang telah diproses akan dipompa kembali ke fryer



F-45 (*)



LF5-JY (F1)




LF8-JY (AS) ()**




LF10-JY

Diagram of Acid Value Changes

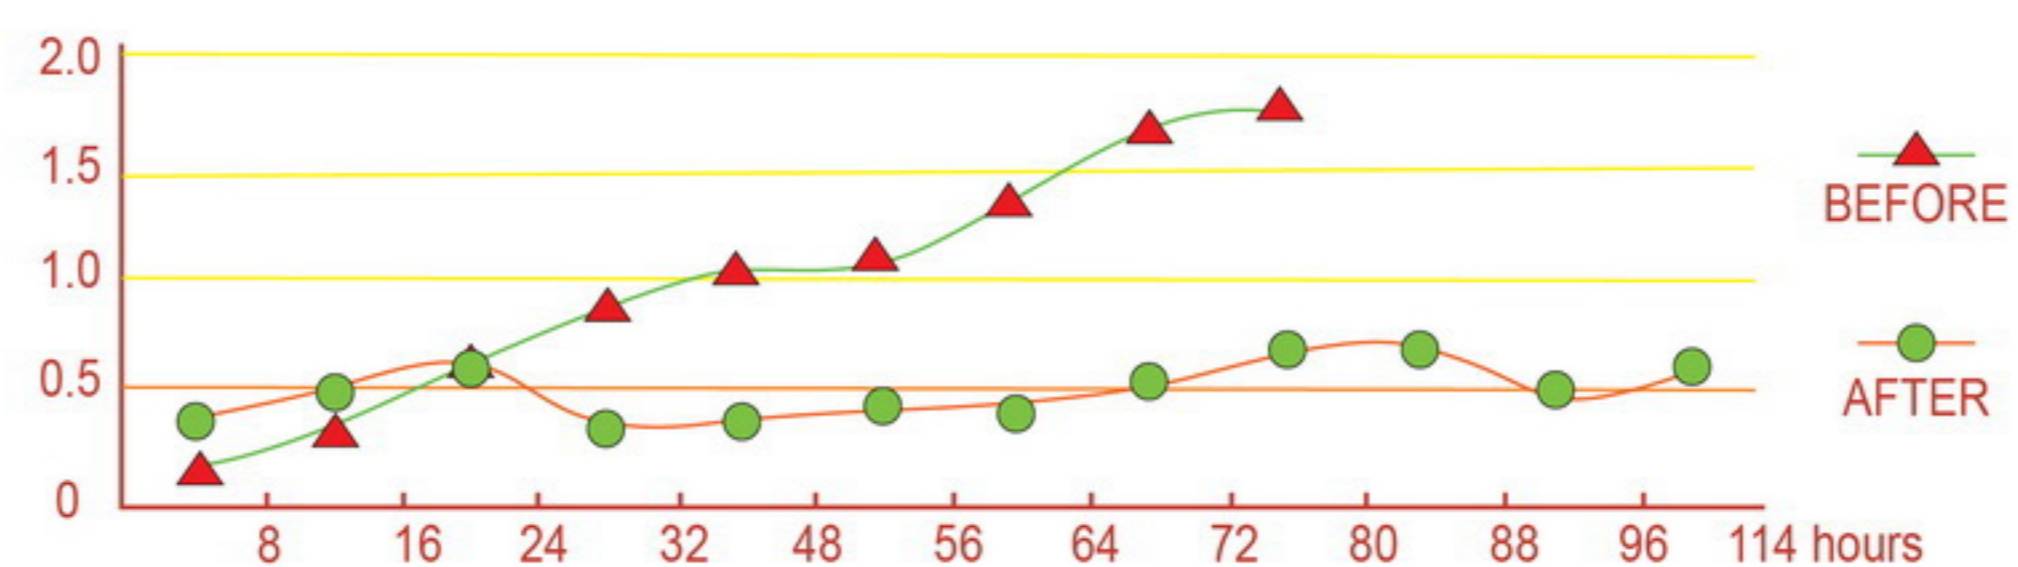

Color Changes of Oil Sample

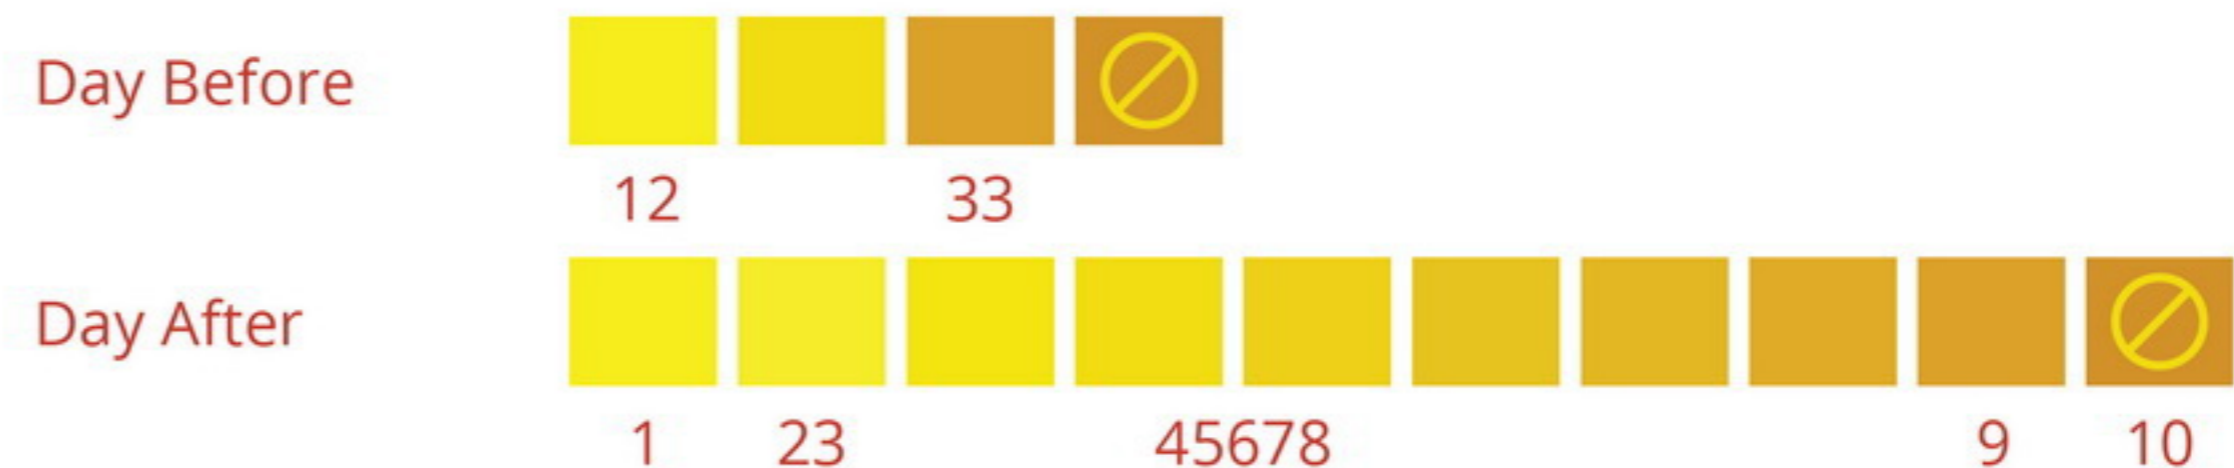

Spesifikasi Mesin

MODEL	DIMENSION (cm)			CAP. (L)	WATT	WEIGHT (kg)	QTY/1 TIME USAGE		ORIGIN
	L	W	H				Filter Paper	Compound	
F-45	19,3	12	37,4	20	300	8,4	1	0,09 ~ 0,12	China
LF5-JY (F1)	59	34	35	40	300	37	1	0,1 ~ 0,2	
LF8-JY (AS)	96	59	78,8	80	550	120	1	0,3	
LF10-JY	82,5	86,5	78,5	120	750	100	1	0,4	

Spesifikasi Filter Paper

MODEL	DIMENSION (cm)		pcs/box	ORIGIN
	L	W		
FS 45-W	-	-	50	China
FS 5-W	45	33	100	
FS 8-W	49,5	49,5	100	
FS 10-W	64,5	64,5	100	

(*) F-45 : Use directly on the fryer
 (**) LF8-JY(AS) : Equipped with an auto suction function to suck dirty oil on the fryer into the oil filter machine for cleaning.

Digital Scale

Features


- Stainless steel platform
- 5 price memory
- 5 digits weight indicator
- 6 digits unit price display
- 7 digits for total price display
- Min. weight: 100g, max. 15 kg



GSC15



GTC30

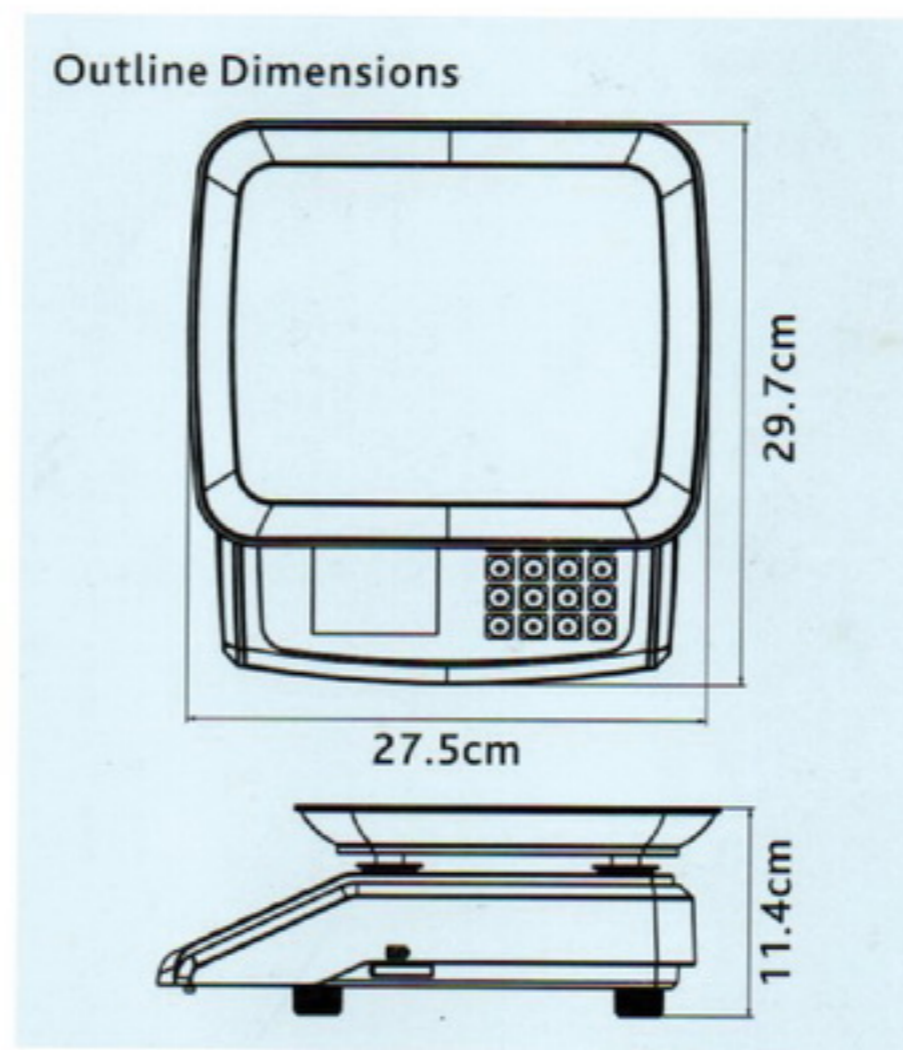

GPS-30

Features

- LCD with white backlight
- Compact design, convenient for roadside stall
- Capacity:30 kg, Division:10 g
- Min. weight: 200 g
- Large display: weight, unit price, amount
- Tare / Zero / Clear total
- Framework structure with pressure-limit protection
- Automatic energy saving mode

Power supply 3,7V/2.0Ah rechargeable lithium battery or DC 5V/1A power bank or Adaptor



Hanging Digital Scale




GHS 30



(Rear View)

Features

- LCD with white backlight
- Capacity: 30 kg, Division: 10 g, Min. weight: 200 g
- High precision strain gauge technology
- Rapid price amount computing
- Dual display: weight, unit price, amount
- Bowl dimension: Dia. 31.1 cm
- Tare / Zero / Add-up / Total display / Clear total
- Framework structure with pressure-limit protection
- Low voltage display / Overcharge protection
- Automatic energy saving mode
- Built-in 4V/4Ah rechargeable battery
- Power: AC/DC charger

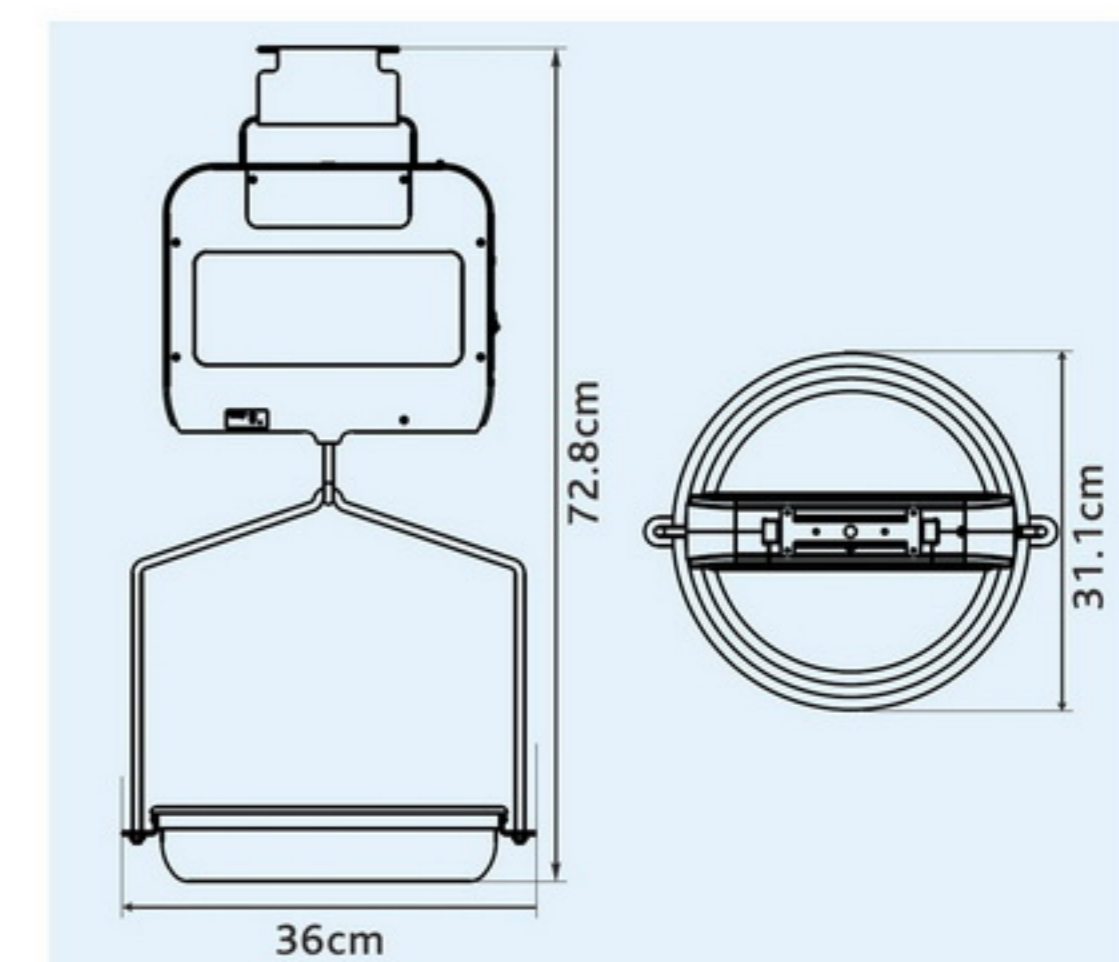

TYPE	DIMENSION (cm)			CAPACITY		WATT (220V/1P/50Hz)	DIVISION	WEIGHT (kg)	ORIGIN
	L	W	H	Min.	Max..				
GSC15	35,5	23,5	14,5	0,1 kg	15 kg	3 W	5 g	3,2	China
GTC30	30	23	15,5	0,2 kg	30 kg	3 W	10 g	3,4	
GPS-30	27,5	29,7	11,4	200 gram	30 kg	5 W	10 g	12 / 15,9	
GHS 30	29,5	69	34,5	200 gram	30 kg	16 W	10 g	2,5 / 3,5	

Dial Spring Scale

Timbangan Duduk Manual



GSP-20

Features

- Dial spring scale
- Color: blue, Spray painting
- With stainless steel bowl diameter 25 cm
- Easy to operating
- Capacity max: 20kg
- Division: 100gram (*)

TYPE	DIMENSION (cm)			CAPACITY	DIV.	WEIGHT NW/GW (kg)	ORIGIN
	L	W	H				
GSP-20	25,8	17,8	31,4	20 kg	100 g	2 / 2,5	China

Digital Platform Scale

Stainless steel platform



Indicator front



Indicator rear



GFS-300

Features

- Dual display / Front & Rear Indicator
- Capacity: 300 kg, Division: 100 g / Min. weight: 2 kg
- Platform dimension: 49 x 39 cm
- High precision strain gauge technology
- Stainless steel plate & indicator
- Water resistant panel
- High light LED
- Display: weight, unit price, sum
- Tare / Zero / Add-up / Total display / Clear total
- Fast weighing & Price calculating
- Low voltage display / Overcharge protection
- Automatic energy saving mode



Foldable pole

Checker plate iron with bluetooth

Features

- Strong construction design platform checker plate iron with stainless steel keyboard
- Capacity: 300 kg, Division: 100 g / Min. weight: 2 kg
- LCD with white backlight
- Wireless bluetooth display, convenient to industrial and commercial weighing
- Reliable performance with price computing function
- Built-in 4V/4Ah rechargeable battery
- Power: AC/DC charger



GFR 300

TYPE	DIMENSION (cm)			CAPACITY		WATT (220V/1P/50Hz)	DIVISION	WEIGHT (kg)	ORIGIN
	L	W	H	Min.	Max.				
GFS-300	49	39	85	2 kg	300 kg	16	100 g	11,7 / 13,2	China
GFR 300	45	55	12	2 kg	300 kg	16	100 g	14,3 / 15,4	

Automatic Weighing Machine

INTELLIGENT WEIGHING FILLER

Solusi efisien untuk pengukuran dan pengisian produk secara presisi ke dalam kemasan. Mesin inovatif ini hadir dalam tiga varian: model untuk produk berbentuk granular (FZ-100) , (FM-500) produk powder semi otomatis menggunakan pedal, dan (FL-500) dengan mekanisme rotary yang full automatic.

Display pengontrol digital yang mudah digunakan, mengatur bobot yang diinginkan menjadi mudah. Dengan weighing range (*) 10 hingga 500 gram dan kapasitas mengisi ke dalam kemasan hingga 12 bag/menit, memastikan pengoperasian yang cepat dan akurat. Cocok untuk menimbang dan mengisi produk berukuran seragam seperti bubuk, granul, beras, gula pasir, tepung, biji-bijian, kopi, teh, gandum, makanan kering, dll.

TYPE	MEKANISME
FZ-500	Semi-Automatic, menggunakan pedal
FM-500	
FL-500	Sistem Rotary Full Automatic, tanpa pedal

Features

- Digital Controller
- Filler control panel: Adjust, Setting, Parameter
- Rotary-type system (FL-500)
- Foot pedal SWITCH (FZ-500&FM-500)
- Weight sensor
- Stainless steel body
- With hopper, except:FL-500
- Observation window glass
- Power switch (ON/OFF)
- Handle lock (overval)
- Easy to operating



Gambar Sistem Rotary



FZ-500



FM-500



FL-500
(Rotary Type)

- Weighing range adalah kisaran bobot yang dapat diukur minimum - maksimum yang bisa diakomodasi
- Rotary-type mesin beroperasi dengan mekanisme putar-menurun, mengisi kemasan dengan jumlah produk yang tepat berdasarkan beratnya tanpa menggunakan pedal untuk mengeluarkannya.

TYPE	DIMENSION (cm)			BUCKET SIZE (cm)	WEIGHT RANGE (gram)	CAPACITY (bag/min)	POWER (220V/1P)	PRODUCT	DEVIATION (gram)	WEIGHT (Kg)	ORIGIN
	L	W	H								
FZ-500	46	30	77	21x18	10 ~ 500	5 ~ 12	80 W	Granular	± 2	20	China
FM-500	46	30	77	24x24x25	10 ~ 500	5 ~ 12	80 W	Powder	± 2	20	
FL-500	43	38	55	20x17	10 ~ 500	5 ~ 10	90 W	Powder	± 2	28	

S/S Disinfection Cabinet

Kabinet untuk penyimpanan alat-alat makan, seperti: piring, mangkok, sendok garpu agar higienis. Dengan temperatur tinggi efektif membunuh kuman, bakteri dan jamur.



GBR-4



Features

- Infrared Heater: radiates heat evenly as well as for energy savings
- Glass window for easy monitoring
- Digital control
- Full stainless steel
- Insulation
- Internal Fan Motor: for even distribution of temperature

TYPE	DIMENSION (cm)			VOLUME (L)	WATT (220V/1P)	TEMP. (°C)	WEIGHT (kg)	ORIGIN
	L	W	H					
GBR-4	131	65	198	720	4800 W	60 ~ 110	148	China

S/S Sterilizer Cabinet

Kabinet yang berfungsi membunuh kuman dan sterilisasi alat-alat makan, seperti: piring, mangkok, sendok/garpu dan alat rumah tangga, groceries dll. agar terbebas dari bakteri yang merugikan kesehatan kita. Dengan teknologi lampu UV type C + Ozon efektif mampu membunuh kuman, bakteri dan jamur.



anti virus & bacteria



GTP78B1

Features

- Sudah dilengkapi dengan timer
- Body stainless steel
- Dilengkapi dengan door switch
- Dilengkapi Ozon

*) Saat penggunaan unit, tidak disarankan menatap UV secara langsung.

*) Rekomendasi penggunaan minimum 30 menit

TYPE	DIMENSION (cm)			VOLUME (L)	WATT (220V/1P)	OZON (mg/m ³)	UV LAMP (pcs)	SHELF (pcs)	WEIGHT (kg) Nett Gross	ORIGIN
	L	W	H							
GTP78B1	39	36	65	51	15	standard 10 sd 40	1 x 8 W	2	10 / 11	China

Maki Cutter & Rice Maker



FTN-110



Features

- Automatically produces perfects flavoured Sushi rice maintaining its best taste, even much longer at the temperature between 5°C ~ 15°C
- Mixing modes are changeable according to types of rices
- Washable parts can be disassembled & reassembled w/o tools
- Connectable to household electric outlets
- Easy to operate with the buttons & easy to relocate w/ caster

MODEL	DIMENSION (cm)			ROLL CAPACITY (per hour)	WATT	WEIGHT (kg)	ORIGIN	ORIGIN
	L	W	H					
FTN-110	31	56	36	500	40 W	30	Korea	China

Flexible Motorized Roller Conveyor



Seri FPR

Roller conveyor bermotor yang bisa memanjang dengan speed & arah pengangkutan yang dapat dikendalikan, tinggi kaki penyangga dapat diatur, dan catu daya yang cukup dengan satu motor per section. Cocok untuk mengangkut barang secara intensif, khususnya barang bawah rata. Aplikasi : Gudang, area logistik perusahaan, bengkel, pelabuhan, dermaga, media angkut barang yang mudah, aman, efisien.

Features

- 1 motor / section (120cm)
- O ring PU belt
- Frame: 3,5mm thickness galvanized
- Leg: 32x32 outer tube spray painting
- Control Box: Forward/Stop/Reverse, Emergency Stop
- 5" Caster, swivel with lock
- Easy joint two or more units by hook
- Package end stop guard

MODEL	DIMENSION (cm)				Ø ROLLER (cm)	MAX LOAD	SPEED (m/)	POWER (watt) (220V/1P)	WEIGHT (kg)	ORIGIN
	Length		Width	Height (Adjust.)						
	Close	Open								
FPR-O4.8-600	184	480	60	60 ~ 80	5	50	10 ~ 18	4 x 90W	200	China
FPR-O6-600	230	600	60	60 ~ 80	5	50	10 ~ 18	5 x 90W	250	
FPR-O4.8-800	184	480	80	60 ~ 80	5	50	10 ~ 18	4 x 90W	240	
FPR-O6-800	230	600	80	60 ~ 80	5	50	10 ~ 18	5 x 90W	300	

Gravity Conveyor




TBR-6

Features

- Frame Material : Carbon Steel Paint
- Rollers Main Convy. Ø5cm S/s201; 7,5 cm Pitches
- Roller on Transfer Slider Section Ø2,5 cm S/s201
- Swivel Castor with Lock
- Package end stop guard
- Conveyor Width : 60 cm

MODEL	DIMENSION (cm)				Ø MAIN-ROLLER (cm)	MAX LOAD (kg/m)	ORIGIN
	Length		Width	Height			
	Close	Open					
TBR-6	351,2	600	72,8	63 ~ 85	5	50	China

Truck Loading Conveyor

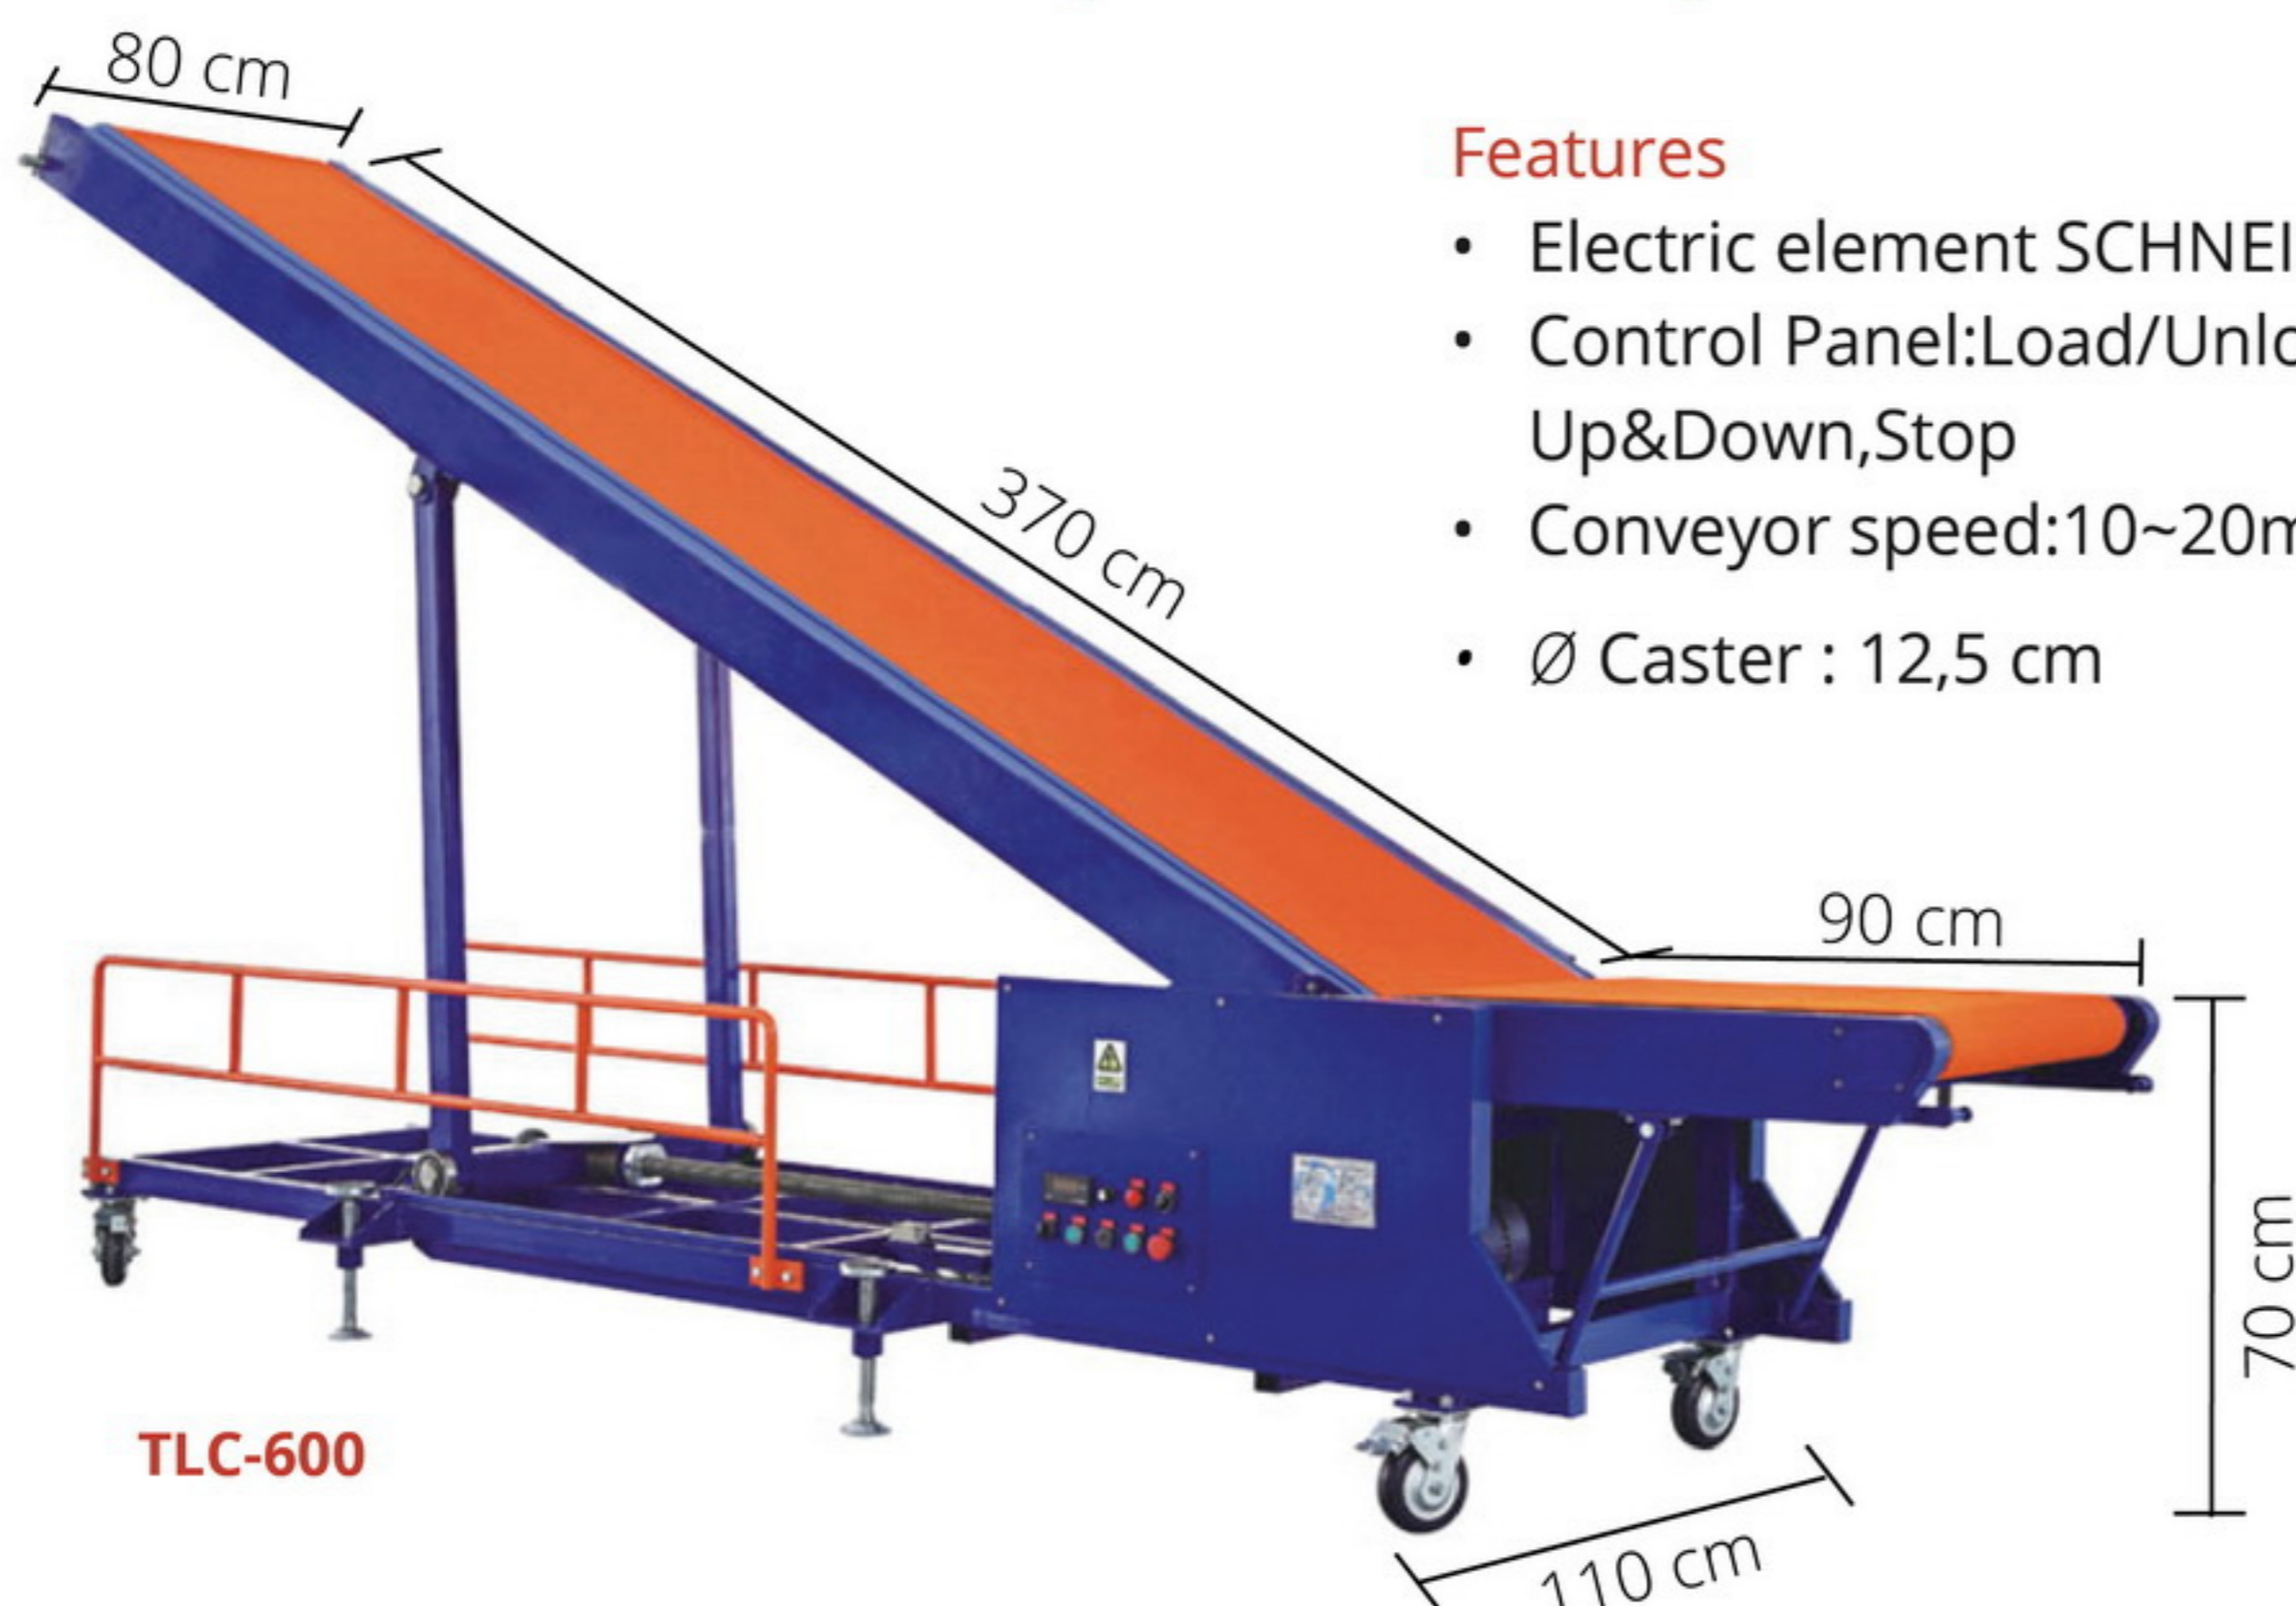

TLC-600

Features

- Electric element SCHNEIDER
- Control Panel: Load/Unload, Up&Down, Stop
- Conveyor speed: 10~20m/min
- Ø Caster : 12,5 cm

MODEL	TLC-600
DIMENSION (cm)	460 x 110 x 70
BELT WIDTH (cm)	60
ADJUST. HEIGHT (cm)	70 ~ 250
MAX LOAD	50 kg/m
POWER (watt)	3700 (380V/3P)
GROSS WEIGHT (kg)	650
ORIGIN	China


Truck Loading Conveyor



CLBC-600 (Part-1)

Features

- Caster: 5", swivel with lock
- Leg: 32x32 steel tube
- Control Box: Forward/Stop/Reverse, Emergency Stop

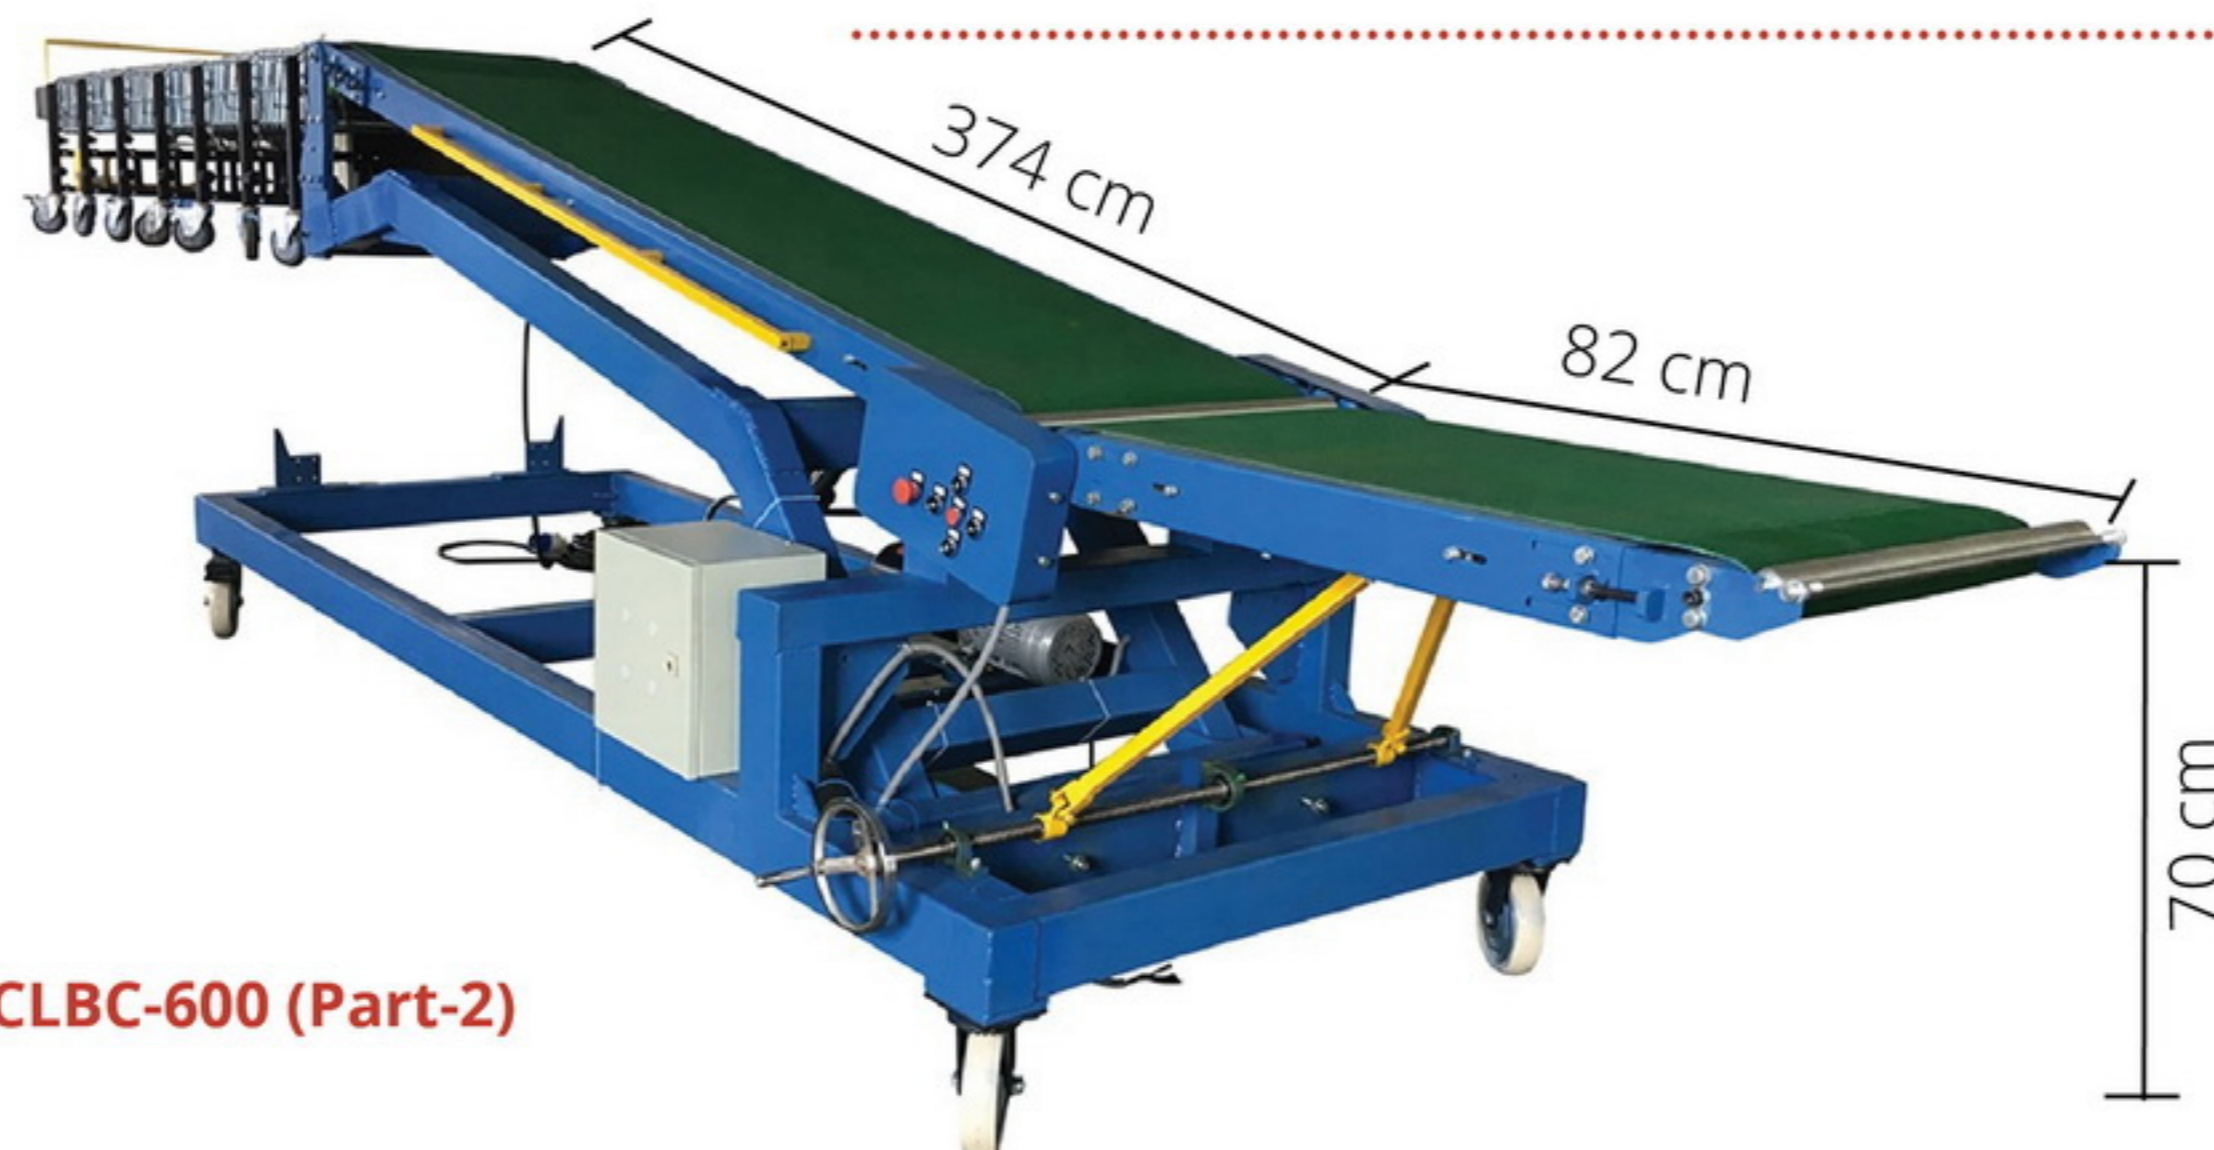

CLBC-600 (Part-2)

Features

- PVC Belt thickness: 3mm, anti skidding
- PVC Caster: 8", swivel with lock
- Control Box: Belt, Forward, Stop, Reverse, Up-Down, Emergency Stop

MODEL	CONVEYOR SIZE (cm)			Ø ROLLER (cm)	MAX LOAD (kg/m)	SPEED (m/min)	POWER (380V/3P)	ORIGIN
	Length	Width	Height (Adjust.)					
CBLC-600 (Part-1)	720	60	60 / 80	5	50	10 ~ 18	630 Watt	China
(Part-2)	440	60	160	-	50	10 ~ 20	3000 Watt	

S/S Kitchen Waste Processor

Menghancurkan sisa makanan dapur dengan hasil menjadi cairan. Sistem kerja perputaran *bowl grinder* motor speed tinggi dibantu aliran air menghaluskan limbah menjadi cairan, hasil ditampung di bak penampungan. Endapan limbah untuk pupuk organik cair, campuran pakan ternak, kompos, dll. Untuk dapur restoran, hotel, catering, rumah sakit, dll. Contoh limbah dapur berupa sayuran, buah-buahan, nasi, kulit kerang, tulang ikan, cangkang telur, daging, ikan, kacang, bonggol jagung, dll.




HR-1500

Features

- Electric box controller
- Stainless steel 304
- Stainless steel grinder
- Emergency stop
- Voltage indicator
- Ampere indicator
- Switch ON/OFF
- Water inlet faucet
- Power indicator

Note

- Limbah cair mohon tidak langsung dibuang ke saluran drainase, karena dapat menyebabkan got mampat
- Unit ini perlu koneksi air saat mesin dihidupkan. Menghidupkan mesin tanpa aliran air menyebabkan kerusakan grinder.

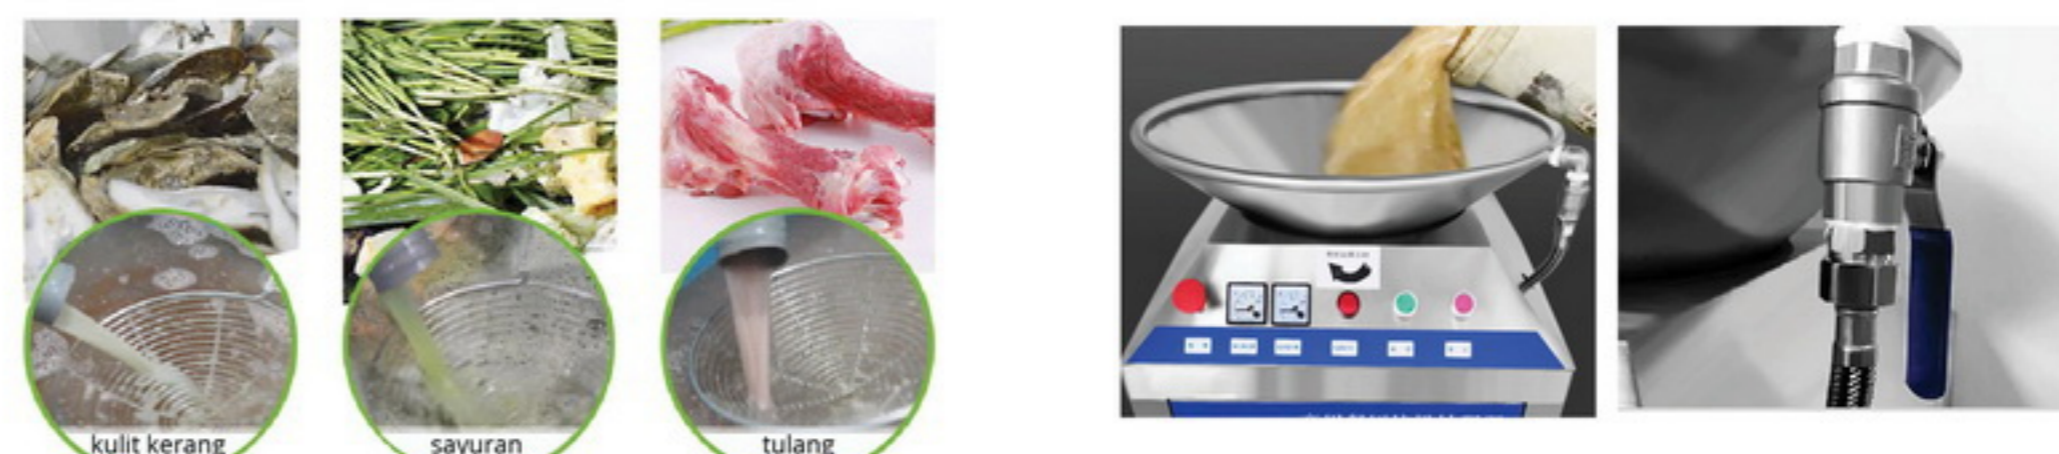

TYPE	DIMENSION (cm)			ROTATE SPEED (rpm)	WATT (380V/3P/50Hz)	CAPACITY (kg/h)	WEIGHT (kg)	ORIGIN
	L	W	H					
HR-1500	54	50	81,5	2800	1500 W	300~500	70	China

Autoclave Vertical Pressure Steam Sterilizer



Mesin sterilisasi yang sangat penting terutama industri pengolahan makanan dan minuman dalam kemasan botol kaca. Menggunakan uap air panas bertekanan tinggi untuk sterilisasi, membunuh bakteri, virus, dan jamur yang ada di dalam produk kemasan botol kaca, jar food, fruit jar, minuman kaleng, pengalengan ikan, produk susu kemasan botol kaca, selai buah kemasan jar/toples, dll.

Features

- Fully Stainless steel structure
- LED display of working status, touch type key
- Auto discharge the cool air, and steam discharging automatically after sterilization
- Pressure Gauge
- Automatically shut-off with beep reminding after sterilization
- Easy to operate, safe and reliable
- Temperature selection range : 105 ~ 134°C
- Timer : 0-99 min
- Recommend sterilization time : 15 ~ 40 minute/cycle
- Safety: water lack, over current, over pressure



Safety Valve

LS-50LD, LS-100LD, LS-150LD

TYPE	DIMENSION (cm)			CHAMBER VOLUME	POWER (220V/1P/50Hz)	MAX. WORKING		NW/GW (Kg)	ORIGIN
	L	W	H			PRESSURE	TEMPERAT.		
LS-50LD	52	52	98	50L (Ø34x55)	2 x 1,5 kW			50 / 68	
LS-100LD	59	59	108	100L (Ø44x65)	3 x 1,5 kW	0,22 MPa	105~134°C	85 / 105	China
LS-150LD	67	69	113	150L (Ø51x74)	3 x 2 kW			110 / 135	



FOOD METAL DETECTOR

WITH TOUCH SCREEN DIGITAL CONTROLLER

Detektor Logam seri 'SA' menghadirkan solusi mutakhir untuk keamanan produk kemasan untuk usaha kuliner khususnya produk makanan dan minuman, seperti : bakso, kornet, margarin, mentega, nugget, oat, gula, kopi, sosis, teh, ikan, udang, kepiting, minuman kemasan, dll. Kemampuan handal secara efektif memindai produk kemasan. Sensitivitas detektor yang andal ini memastikan manajemen risiko yang mengidentifikasi, mengevaluasi, dan mengendalikan risiko bahaya terkait keamanan pangan HACCP (Hazard Analysis Critical Control Points), membantu mencegah kontaminasi logam, sehingga menjamin keamanan bagi konsumen.

Pengontrol digital layar sentuh yang mudah digunakan, lampu alarm dengan buzzer, dan fungsi stop konveyor. Kecepatan konveyornya yang dapat disesuaikan untuk berbagai kebutuhan produksi, rangka / bodi dari stainless steel dan kenop emergency. Selain itu, dilengkapi roda untuk kemudahan mobilitas.

Mesin ini cocok digunakan di perusahaan bakery, perusahaan prepacked food, frozen food, perusahaan pengepakan udang / seafood, industri pengolahan makanan, dll.




SA-1510



SA-4030

Features

- Touch screen digital controller
- Light indicator, alarm buzzer, stop conveyor
- Adjustable conveyor speed (20~40 m/min)
- Stainless steel body
- Emergency stop knob
- Castor with stopper
- Easy to operate

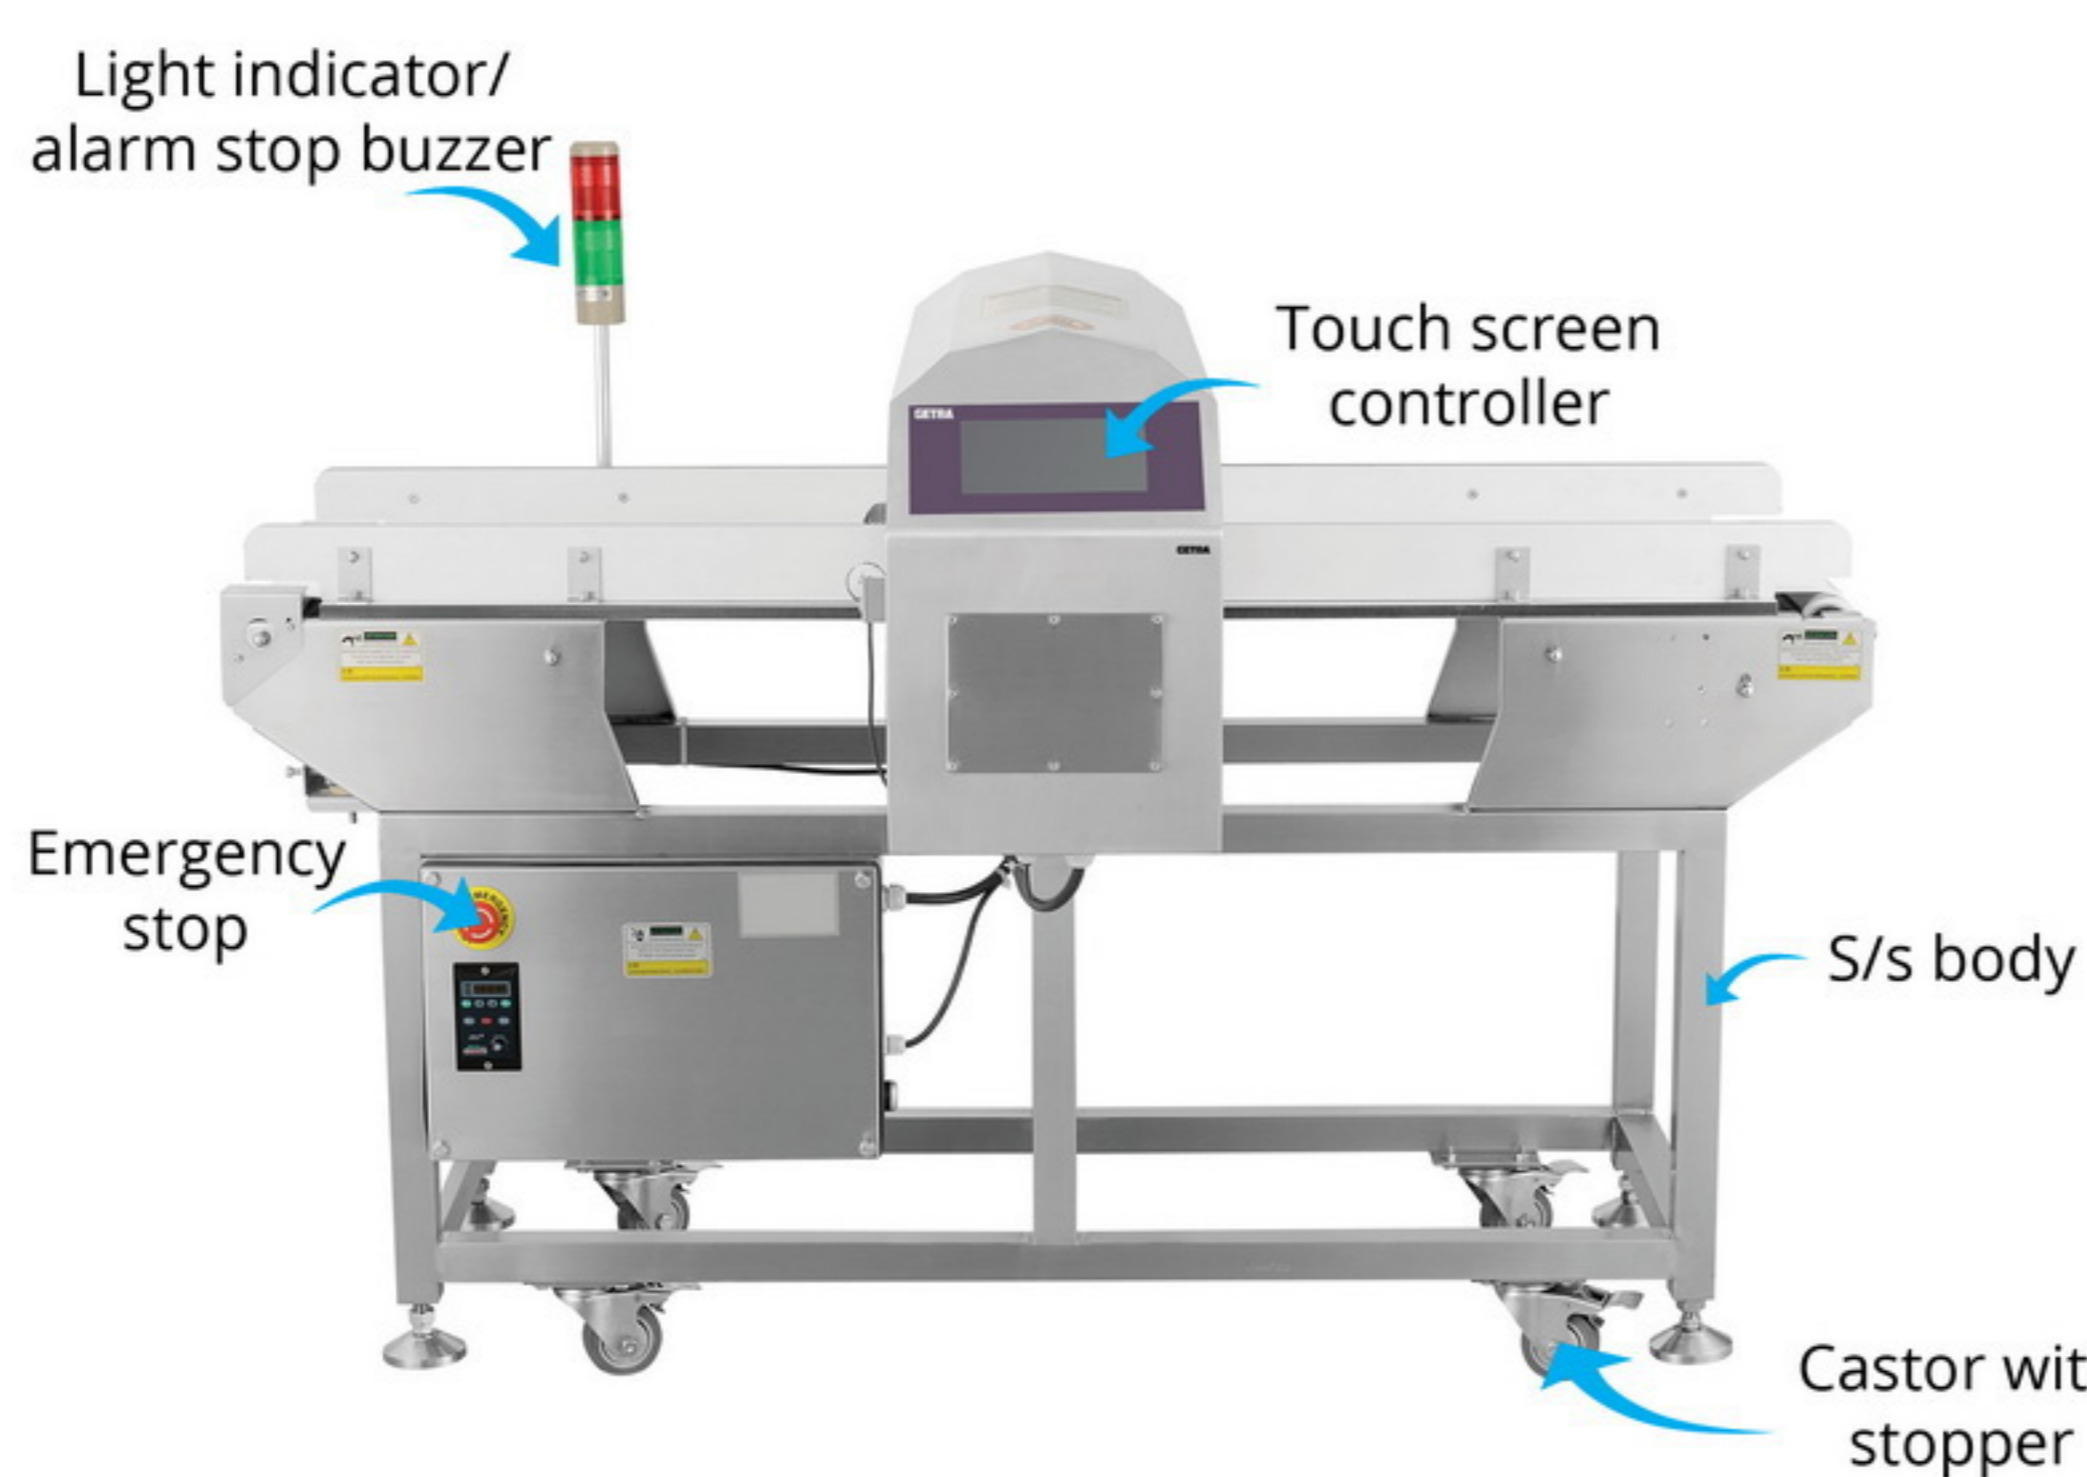

L : Lebar tunnel
H : Tinggi tunnel



SA-1510 = Lebar 15 cm, Tinggi : 10 cm

TYPE	DIMENSION (cm)			TUNNEL SIZE (cm)		POWER (W) 220V/1P/50Hz	MAX LOAD CAP (Kg)	CONVY. SPEED (m/min)	WEIGHT (NW/GW) (Kg)	ORIGIN
	L	W	H	L	H					
	SA-1510	143	65	118	15					
SA-3020	143	78	118	30	20	200	10	230/245		
SA-4030	143	88	128	40	30	200		245/260		