

for more information, please contact us:



UD. SUMBER REJEKI (balicoolers.com)

THE BEST PROVIDER FOR YOUR REFRIGERATION AND KITCHEN EQUIPMENT

HEAD OFFICE AND SHOWROOM

Jl. Gatot Subroto Barat No. 439 Denpasar Bali

081338999983 (HP / WA / SMS)

sumberrejekibali@gmail.com

balicoolers@gmail.com

info@balicoolers.com



SPA-0303B



SPA-0403B



SPA-0903B

General Information:

- Equipped with free maintenance condenser
- Automatic defrost with self-evaporating tray
- LED lighting, IP 65 protection
- DC motor for faster cooling, low energy consumption
- Castor, lock & adjustable legs fitted as standard
- Test under tropical condition

Model

Cabinet

external dimension (mm)
gross capacity (liters)
no.of shelves (pcs)
net weight (kgs)
product display (M2)
foot print (M2)

SPA-0253B SPA-0303B SPA-0353B SPA-0403B

560Wx510Dx1650H 560Wx510Dx1750H 615Wx510Dx1850H 615Wx510Dx2000H

270 290 340 400

4 4 5 5

60 63 76 82

0.5 0.55 0.67 0.75

0.29 0.29 0.31 0.36

SPA-0903B

1235Wx510Dx2020H
810
10
123
2*0.70
0.63

Refrigeration

refrigerant R-134a
cooling (C) 0° - 7°
power supply 220-240V.50Hz.

R-134a 0° - 7° 220-240V.50Hz.
R-134a 0° - 7° 220-240V.50Hz.
R-134a 0° - 7° 220-240V.50Hz.
R-134a 0° - 7° 220-240V.50Hz.

R-134a 0° - 7° 220-240V.50Hz.

Product Load

330ml cans (facing/total) 7/210
500ml PET (facing/total) 7/105

7/280 8/350 8/400 16/800
7/140 8/175 8/200 16/400

Transportation

20' container 44
40' container 88

44 36 36 17
88 72 72 37



SDC-1000AY



SDC-1500AY

SDC coolers

Cabinet

external dimension (mm)	1200Wx680Dx2050H	1800Wx680Dx2050H
gross capacity (liters)	1040	1590
no. of shelves (pcs)	10	15
net weight (kgs)	165	200
foot print (m ²)	0.82	1.22
lighting	LED	LED



081338999983

Refrigeration

refrigerant	R-134a	R-134a
cooling (C)	0° ~ 7°	0° ~ 7°
evaporator	fin & tube	fin & tube
condenser	wire & tube	wire & tube
power supply	220-240V.50Hz.	220-240V.50Hz.

Product Load

330ml cans (facing/total)	N/A	N/A
500ml PET (facing/total)	N/A	N/A

Transportation

20' container	11	9
40' container	23	18



SPM-1003



SPM-1503



SPM-1003

SPM-1503

Cabinet

external dimension (mm)	1200Wx650Dx2050H	1800Wx650Dx2050H
gross capacity (liters)	1040	1590
no. of shelves (pcs)	10	15
net weight (kgs)	165	200
foot print (sq)	0.78	0.78
lighting	LED	LED



0813389999883

Refrigeration

refrigerant	R-134a	R-134a
cooling (C)	0° ~ 7°	0° ~ 7°
evaporator	fin & tube	fin & tube
condenser	wire & tube	wire & tube
power supply	220-240V.50Hz.	220-240V.50Hz.

Product Load

330ml cans (facing/total)	N/A	N/A
500ml PET (facing/total)	N/A	N/A

Transportation

20' container	11	7
40' container	23	14



YPM-110P



YPM-165P



YDM-110P



YPM-110P

YPM-165P

YDM-110P

Cabinet

external dimension (mm)	1100Wx600Dx2000H	1650Wx600Dx2000H	1100Wx600Dx2000H
gross capacity (liters)	680	1044	680
no. of shelves (pcs)	10	15	6
net weight (kgs)	155	185	168
foot print (M2)	0.66	0.99	0.66
lighting	LED	LED	LED



081338999983

Refrigeration

refrigerant	R-134a	R-134a	R-134a
cooling (C)	0° ~ 7°	0° ~ 7°	Top: 0° ~ 7° / Bottom: -1° ~ -6°
evaporator	fin & tube	fin & tube	fin & tube
condenser	wire & tube	wire & tube	wire & tube
power supply	220-240V.50Hz.	220-240V.50Hz.	220-240V.50Hz.

Product Load

330ml cans (facing/total)	N/A	N/A	N/A
500ml PET (facing/total)	N/A	N/A	N/A

Transportation

20' container	16	10	16
40' container	34	21	34

SNH-Series




SNH-0105 SNH-0155 SNH-0205 SNH-0265 SNH-0355 SNH-0405



Electronic Control
Ensure the Selected Temperature is Precisely Maintained



Super Freezing
52 Hours Non-Stop for Chilling Large Amount of Food and Automatically Return to Normal Mode



Removable Gasket
Prevent the Cold Air from Escaping and Easy For Cleaning



Compressor Surrounded with Foaming
Reducing Noises and Protect the Compressor



The Power Failure Safe Storage
24 up to 100 Hours Rising Time to Keep the Food Frozen without Power (Depend on the Models)



LED Lighting
Energy Efficient and Longer Durability

Model **SNH-0105** **SNH-0155** **SNH-0205** **SNH-0265** **SNH-0355** **SNH-0405**

Cabinet

external dimension (mm)	545Wx550Dx850H	705Wx550Dx850H	905Wx550Dx850H	960Wx700Dx850H	1120Wx700Dx850	1300Wx700Dx850H
gross capacity (liters)	100	150	200	260	350	400
no. of basket (pcs)	1	1	1	1	1	1
net weight (kgs)	24	28	32	40	44	50
foot print (M2)	0.30	0.39	0.5	0.67	0.78	0.91
lock	yes	yes	yes	yes	yes	yes
lighting	LED	LED	LED	LED	LED	LED

081338999983

Refrigeration

refrigerant	R-600a	R-600a	R-600a	R-600a	R-600a	R-600a
cooling (C)	-18°~ -24°C	-18°~ -24°C	-18°~ -24°C	-18°~ -24°C	-18°~ -24°C	-18°~ -24°C
power supply	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.
evaporator	pipe on sheet	pipe on sheet	pipe on sheet	pipe on sheet	pipe on sheet	pipe on sheet
condenser	wire condenser	wire condenser	wire condenser	wire condenser	wire condenser	wire condenser

Transportation

20' container	124	96	74	52	46	37
40' container	248	193	149	105	92	75




SNH-0605



Electronic Control
Ensure the Selected Temperature is Precisely Maintained



Super Freezing
52 Hours Non-Stop for Chilling Large Amount of Food and Automatically Return to Normal Mode



Removable Gasket
Prevent the Cold Air from Escaping and Easy For Cleaning



Compressor Surrounded with Foaming
Reducing Noises and Protect the Compressor



The Power Failure Safe Storage
24 up to 100 Hours Rising Time to Keep the Food Frozen without Power (Depend on the Models)



LED Lighting
Energy Efficient and Longer Durability




Model SNH-0605

Cabinet

external dimension (mm)

1640Wx700Dx850H



gross capacity (liters)

500

no. of basket (pcs)

1

net weight (kgs)

75

081338999983

foot print (M2)

1.15

lock

yes

lighting

LED

Refrigeration

refrigerant

R-600a

cooling (C)

-18°~ -24°C

power supply

220-240V. 50Hz.

evaporator

pipe on sheet

condenser

wire condenser

Transportation

20' container

31

40' container

63



SNC-0143



SNC-0283

SNC-0353



SNC-0143

SNC-0283

SNC-0353

Cabinet

external dimension (mm)	615W x 690D x 830H	1050W x 695D x 920H	1225W x 695D x 920H
gross capacity (liters)	142	270	330
no. of basket (pcs)	1	4 w/divider	5 w/divider
net weight (kgs)	40	58	68
foot print (M2)	0.42	0.73	0.85
lock	N/A	yes	yes
lighting	N/A	LED	LED



081338999983

Refrigeration

refrigerant	R-134a	R-134a	R-134a
cooling (C)	-18° ~ -22°	-18° ~ -22°	-18° ~ -22°
power supply	220-240V.50Hz.	220-240V.50Hz.	220-240V.50Hz.
evaporator	pipe on sheet	pipe on sheet	pipe on sheet
condenser	pipe on sheet	pipe on sheet	pipe on sheet

Transportation

20' container	48	30	24
40' container	102	60	54



SNC-0433
SNC-0513




SNC-0433

SNC-0513

Cabinet

external dimension (mm)	1495W x 695D x 920H	1620W x 695D x 952H
gross capacity (liters)	420	520
no. of basket (pcs)	6 w/divider	6 w/divider
net weight (kgs)	75	84
foot print (M2)	1.04	1.18
lock	yes	yes
lighting	LED	LED



081338999983


Refrigeration

refrigerant	R-134a	R-134a
cooling (C)	-18° ~ -22°	-18° ~ -22°
power supply	220-240V.50Hz.	220-240V.50Hz.
evaporator	pipe on sheet	pipe on sheet
condenser	pipe on sheet	pipe on sheet

Transportation

20' container	18	18
40' container	42	38

SNE/SNL Series

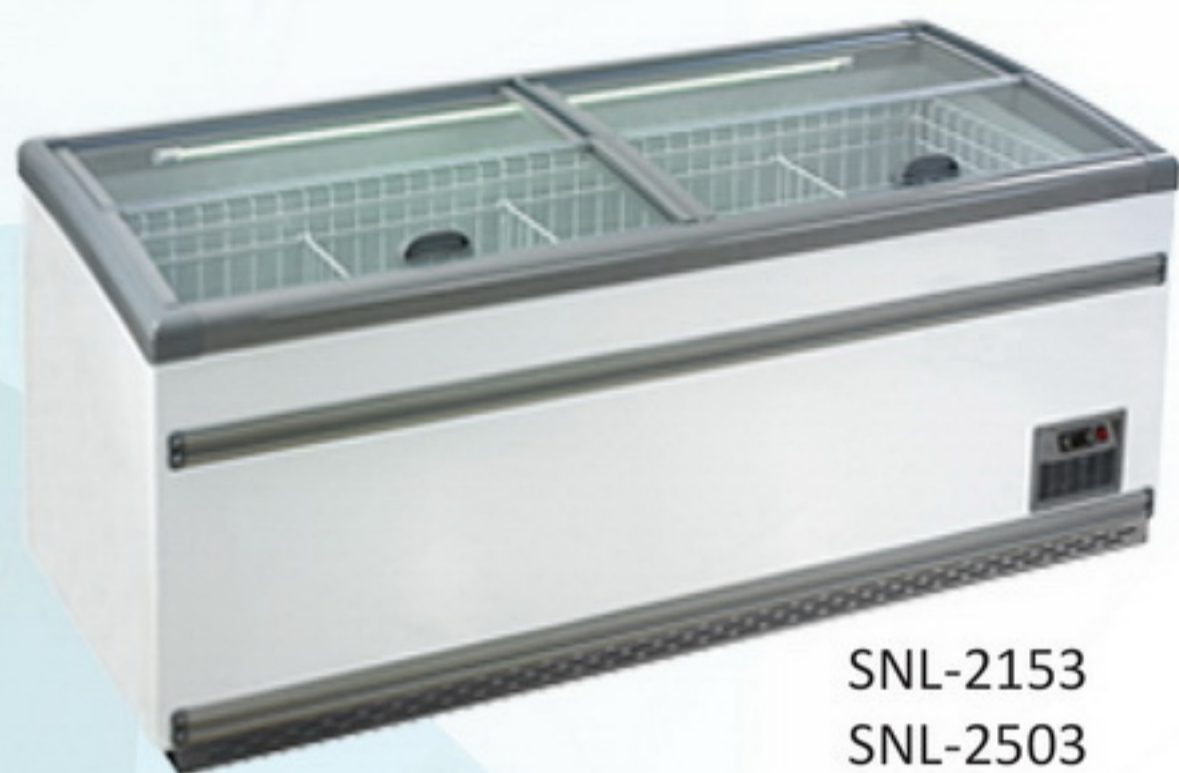

SNL-2153
SNL-2503



SNE-1853

LAYOUT

- End: SNE-1853
- Side: SNL-2153 or SNL-2503

Option 1:



Option 2:



Option 3:



Option 4:



Option 5:



SNE-1853

SNL-2153

SNL-2503

Cabinet

external dimension (mm)	1850W x 850D x 855H	2100W x 850D x 930H	2500W x 850D x 930H
gross capacity (liters)	700	930	1150
no. of basket (pcs)	3	4	5
net weight (kgs)	130	145	165
foot print (M2)	1.57	1.79	2.13
lock	N/A	N/A	N/A
lighting	LED	LED	LED

Refrigeration

refrigerant	R-404a	R-404a	R-404a
cooling (C)	-18° ~ -22°/ 0° ~ 10°	-18° ~ -22°/ 0° ~ 10°	-18° ~ -22°/ 0° ~ 10°
power supply	220-240V.50Hz.	220-240V.50Hz.	220-240V.50Hz.
evaporator	pipe on sheet	pipe on sheet	pipe on sheet
condenser	fin & tube	fin & tube	fin & tube

Transportation

20' container	12	12	8
40' container	24	24	16



081333899983

SNF Series



SNF-0223 SNF-0323 SNF-0403 SNF-0503 SNF-0603



WILL TO SERVE

Model	SNF-0223	SNF-0323	SNF-0403	SNF-0503	SNF-0603
Cabinet					
external dimension (mm)	934Wx574Dx825H	1014Wx694Dx825H	1222Wx694Dx825H	1434Wx694Dx825H	1664Wx694Dx825H
gross capacity (liters)	200	300	400	500	600
no.of basket (pcs)	1	1	1	1	1
net weight (kgs)	45	56	65	73	81
foot print (M2)	0.54	0.7	0.84	0.99	1.14
lock	yes	yes	yes	yes	yes
lighting	LED	LED	LED	LED	LED
Refrigeration					
refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a
cooling (C)	-18°~ -22°C	-18°~ -22°C	-18°~ -22°C	-18°~ -22°C	-18°~ -22°C
power supply	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.
evaporator	pipe on sheet	pipe on sheet	pipe on sheet	pipe on sheet	pipe on sheet
condenser	wire condenser	wire condenser	wire condenser	wire condenser	wire condenser
Transportation					
20' container	63	47	40	33	28
40' container	126	95	81	66	57

081338999983

SNF Series



SNF-0303 SNF-0503
SNF-0403 SNF-0603



Model	SNF-0303	SNF-0403	SNF-0503	SNF-0603
Cabinet				
external dimension (mm)	1014Wx694Dx825H	1222Wx694Dx825H	1434Wx694Dx825H	1664Wx694Dx825H
gross capacity (liters)	300	400	500	600
no.of basket (pcs)	1	1	1	1
net weight (kgs)	56	65	73	81
foot print (M2)	0.7	0.84	0.99	1.14
lock	yes	yes	yes	yes
lighting	LED	LED	LED	LED
Refrigeration				
refrigerant	R-134a	R-134a	R-134a	R-134a
cooling (C)	-18°~ -22°C	-18°~ -22°C	-18°~ -22°C	-18°~ -22°C
power supply	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.	220-240V. 50Hz.
evaporator	pipe on sheet	pipe on sheet	pipe on sheet	pipe on sheet
condenser	wire condenser	wire condenser	wire condenser	wire condenser
Transportation				
20' container	47	40	33	28
40' container	95	81	66	57

081338999983



Cabinet

external dimension (mm)	1850W x 840D x 875H
gross capacity (liters)	600
no. of basket (pcs)	4 dividers
net weight (kgs)	121
foot print (M2)	1.55

lock N/A

lighting LED

Refrigeration

refrigerant	R-404a
cooling (C)	-18° ~ -22°/ 0° ~ 10°
power supply	220-240V.50Hz.
evaporator	pipe on sheet
condenser	fin & tube

Transportation

20' container	12
40' container	24

081338999983

SAG Series



SAG-0583



SAG-0783




SAG-0903



Removable Canopy



Installed with 4 LED strips...outstanding product display!

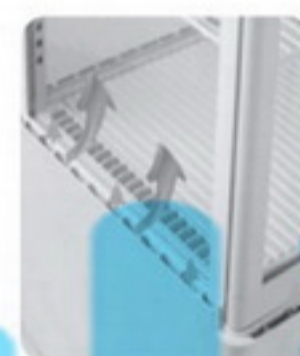

Designed with hot air flow in 4 sides of the glass to prevent foggy

SAG-0583

SAG-0783

SAG-0983

Cabinet

external dimension (mm)	428Wx386Dx810H	428Wx386Dx960H	428Wx386Dx1110H
gross capacity (liters)	58	78	98
no. of shelves (pcs)	2	3	4
net weight (kgs)	30	37	38
foot print (M2)	0.17	0.17	0.17
lighting	LED	LED	LED

Refrigeration

refrigerant	R-134a	R-134a	R-134a
cooling (C)	2° ~ 12°	2° ~ 12°	2° ~ 12°
evaporator	fin & tube	fin & tube	fin & tube
condenser	wire & tube	wire & tube	wire & tube
power supply	220-240V.50Hz.	220-240V.50Hz.	220-240V.50Hz.

Product Load

330ml cans (facing/total)	N/A	N/A	N/A
500ml PET (facing/total)	N/A	N/A	N/A

Transportation

20' container	126	126	126
40' container	252	252	252



081338999983



SSB-0405



SSB-0505

General Information:

- Eco-friendly refrigeration and foaming material
- High pressure injected foam for better insulation
- Automatic defrost with self-evaporating tray
- LED lighting, less energy consumption & long life time
- DC motor for faster cooling, low energy consumption
- High performance compressor, low energy consumption
- Night cover and castor fitted as standard
- Test under "C" condition

Option List:

- Bottle opener & crown catcher
- Roller slide shelves
- Anti rat protection kit
- Anti rat cable
- PRCD cable
- Voltage stabilizer

Model

Cabinet



SSB-0405

SSB-0505

081338999983

external dimension (mm)

590Wx610Dx1980H

645Wx610Dx1980H

gross capacity (liters)

400

450

no.of shelves (pcs)

5

5

net weight (kgs)

85

96

product display (M2)

0.64

0.71

foot print (M2)

0.36

0.4

Refrigeration

refrigerant

HC

HC

cooling (C)

-2°~ -6°C

-2°~ -6°C

power supply

220-240V.50Hz.

220-240V.50Hz.

Product Load

330ml cans (facing/total)

7/420

8/480

500ml PET (facing/total)

7/210

8/240

Transportation

20' container
40' container

27
54

27
54



SPS-0403



SPS-0903



SPS-0403

SPS-0903

Cabinet

external dimension (mm)	615W x 510D x 2000H	1235Wx510Dx2020H
gross capacity (liters)	400	810
no. of shelves (pcs)	5	10
net weight (kgs)	82	123
foot print (M ²)	0.36	0.63
lighting	LED	LED



081338999983

Refrigeration

refrigerant	R-134a	R-134a
cooling (C)	0° ~ 7°	0° ~ 7°
evaporator	fin & tube	fin & tube
condenser	wire & tube	wire & tube
power supply	220-240V.50Hz.	220-240V.50Hz.

Product Load

330ml cans (facing/total)	N/A	N/A
500ml PET (facing/total)	N/A	N/A

Transportation

20' container	36	17
40' container	72	37



SRR-0681A (SUS201) SFR-0681A (SUS201)
 SRR-0684A (SUS304) SFR-0684A (SUS304)

General Information:

- Automatic defrost with self-evaporating tray
- Door frame with hot gas + electric heater
- External LED lighting
- Reversible self & closing door
- Full width handle
- Castor diameter 150mm with 2 front brake
- Door lock are standard
- 60 mm insulation
- CE certification

Option:

- Adjustable legs

Model	SRR-0681A (SUS201)	SFR-0681A(SUS201)
	SRR-0684A(SUS304)	SFR-0684A(SUS304)

Cabinet	081338999983	
external dimension (mm)	680Wx710Dx2010H	680Wx710Dx2010H
gross capacity (liters)	438	438
no.of shelves (pcs)	4	4
net weight (kgs)	91	95

Refrigeration

refrigerant	R-134a	R-404a
cooling °C	0 ~ +10°C	-18 ~ -22°C
compressor	embraco	secop
thermostat	electronic	electronic
rated current	1.8 A	2.8 A
defrost	off cycle	heater
power supply	220V, 50Hz.	220V, 50Hz.

Transportation

20' container	24	24
40' container	48	48



SRR-01341A (SUS201) SFR-1341A (SUS201)
 SRR-1344A (SUS304) SFR-1344A (SUS304)

General Information:

- Automatic defrost with self-evaporating tray
- Door frame with hot gas + electric heater
- External LED lighting
- Reversible self & closing door
- Full width handle
- Castor diameter 150mm with 2 front brake

- Door lock are standard
- 60 mm insulation
- CE certification

Option:

- Adjustable legs

Model

Cabinet

external dimension (mm)
 gross capacity (liters)
 no.of shelves (pcs)

SRR-1341A (SUS210)

SRR-1344A (SUS304)

SFR-1341A (SUS210)

SFR-1344A (SUS304)



081338999983

1340Wx710Dx2010H

1340Wx710Dx2010H

1065

1065

8

8

Refrigeration

refrigerant
 cooling (C)
 compressor
 thermostat
 rated current
 defrost
 power supply

R-404a
 0 ~ -10°
 embraco
 electronic
 4.2 A
 off cycle
 220V. 50Hz.

R-404a
 -18 ~ -22°
 embraco
 electronic
 6.3 A
 heater
 220V. 50Hz.

Transportation

20' container
 40' container

22
 25

22
 25



SRC-1361A (SUS201)
SRC-1364A (SUS304)

SFC-1361A (SUS201)
SFC-1364A (SUS304)

General Information:

- Automatic defrost with self-evaporating tray
- Door frame with hot gas + electric heater
- Reversible self & closing door
- Full width handle
- Castor diameter 150mm with 2 front brake
- 60 mm insulation
- CE certification

Option:

- Adjustable feet
- Back splash top

Model	SRC-1361A (SUS201)	SFC-1361A(SUS201)
	SRC-1364A(SUS304)	SFC-1364A(SUS304)
 Cabinet external dimension (mm)	1360Wx700Dx850H	1360Wx700Dx850H
	081338999983	
gross capacity (liters)	282L	282L
no. of shelves (pcs)	4	4
net weight (kgs)	98KG	98KG
Refrigeration		
refrigerant	R-134a	R-404a
cooling °C	0 ~ +10 °C	-18~ -22°C
compressor	embraco	embraco
thermostat	electronic	electronic
rated current	1.45 A	4.4 A
defrost	off cycle	heater
power supply	220V, 50Hz.	220V, 50Hz.
Transportation		
20' container	24	24
40' container	48	48



SRC-1791A (SUS201)
SRC-1794A (SUS304)

SFC-1791A (SUS201)
SFC-1794A (SUS304)

General Information:

- Automatic defrost with self-evaporating tray
- Door frame with hot gas + electric heater
- Reversible self & closing door
- Full width handle
- Castor diameter 150mm with 2 front brake
- 60 mm insulation
- CE certification

Option:

- Adjustable feet
- Back splash top

Model	SRC-1791A (SUS201)	SFC-1791A(SUS201)
	SRC-1794A(SUS304)	SFC-1794A(SUS304)
  Cabinet external dimension (mm)	081338999983	
	1795Wx700Dx850H	1795Wx700Dx850H
gross capacity (liters)	417L	417L
no.of shelves (pcs)	6	6
net weight (kgs)	114KG	114KG
Refrigeration		
refrigerant	R-134a	R-404a
cooling @	0 ~ +10°C	-18~ -22°C
compressor	embraco	embraco
thermostat	electronic	heater
rated current	1.45 A	4.4 A
defrost	off cycle	off cycle
power supply	220V, 50Hz.	220V, 50Hz.
Transportation		
20' container	16	16
40 container	38	38



SRC-2231A (SUS201)
SRC-2234A (SUS304)

SFC-2231A (SUS201)
SFC-2234A (SUS304)

General Information:

- Automatic defrost with self-evaporating tray
- Door frame with hot gas + electric heater
- Reversible self & closing door
- Full width handle
- Castor diameter 150mm with 2 front brake
- 60 mm insulation
- CE certification

Option:

- Adjustable feet
- Back splash top

Model SRC-2231A (SUS201) SFC-2231A(SUS201)

SRC-2234A(SUS304) SFC-2234A(SUS304)

Cabinet

external dimension (mm)



081338999983

gross capacity (liters)

553L

553L

no. of shelves (pcs)

8

8

net weight (kgs)

132KG

132KG

Refrigeration

refrigerant

R-134a

R-404a

cooling °C

0 ~ +10°C

-18~ -22°C

compressor

embraco

embraco

thermostat

electronic

electronic

rated current

2.5 A

5.1 A

defrost

off cycle

heater

power supply

220V, 50Hz.

220V, 50Hz.

Transportation

20' container

16

16

40' container

32

32



SRC-2231A (SUS201)
SRC-2234A (SUS304)

SFC-2231A (SUS201)
SFC-2234A (SUS304)

General Information:

- Automatic defrost with self-evaporating tray
- Door frame with hot gas + electric heater
- Reversible self & closing door
- Full width handle
- Castor diameter 150mm with 2 front brake
- 60 mm insulation
- CE certification

Option:

- Adjustable feet

Model	SRC-2231A (SUS201)	SFC-2231A(SUS201)
	SRC-2234A(SUS304)	SFC-2234A(SUS304)
 Cabinet external dimension (mm)	2230Wx700Dx850H	2230Wx700Dx850H
 081338999983		
gross capacity (liters)	553L	553L
no. of shelves (pcs)	8	8
net weight (kgs)	132KG	132KG
Refrigeration		
refrigerant	R-134a	R-404a
cooling °C	0 ~ +10°C	-18~ -22°C
compressor	embraco	embraco
thermostat	electronic	electronic
rated current	2.5 A	5.1 A
defrost	off cycle	heater
power supply	220V, 50Hz.	220V, 50Hz.
Transportation		
20' container	16	16
40' container	32	32



SPS-0403



SPS-0903



SPS-0403

SPS-0903

Cabinet

external dimension (mm)	615W x 510D x 2000H	1235Wx510Dx2020H
gross capacity (liters)	400	810
no. of shelves (pcs)	5	10
net weight (kgs)	82	123
foot print (M ²)	0.36	0.63
lighting	LED	LED



081338999983

Refrigeration

refrigerant	R-134a	R-134a
cooling (C)	0° ~ 7°	0° ~ 7°
evaporator	fin & tube	fin & tube
condenser	wire & tube	wire & tube
power supply	220-240V.50Hz.	220-240V.50Hz.

Product Load

330ml cans (facing/total)	N/A	N/A
500ml PET (facing/total)	N/A	N/A

Transportation

20' container	36	17
40' container	72	37



SRS-1361A (SUS201)
SRS-1364A (SUS304)



SRS-1791A (SUS201)
SRS-1794A (SUS304)

General Information:

- Automatic defrost with self-evaporating tray
- Door frame with hot gas + electric heater
- Reversible self & closing door
- Full width handle
- Castor diameter 150mm with 2 front brake
- 60 mm insulation
- CE certification

Option:

- Adjustable feet

Model	SRS-1361 (SUS201) SRS-1364 (SUS304)	SRS-1791 (SUS201) SRS-1794 (SUS304)
Cabinet		
external dimension (mm)	1360Wx700Dx1085H	1795Wx700Dx1085H
gross capacity (liters)	282L	417L
no. of shelves (pcs)	4	4
net weight (kgs)	122KG	142KG
Refrigeration		
refrigerant	R-134a	R-134a
cooling °C	0 ~ +10°C	0 ~ +10 °C
compressor	embraco	embraco
thermostat	electronic	electronic
rated current	2.2 A	2.2 A
defrost	off cycle	off cycle
power supply	220V, 50Hz.	220V, 50Hz.
Transportation		
20' container	24	18
40' container (HQ)	48	38

SANDEN INTERCOOL GLOBAL NETWORK

THAILAND

Headquarters
Sanden Intercool (Thailand) Public Company Limited
97-97/1 Moo 3 Tambol Banmoe Amphur Promburi,
Singburi 16120, Thailand
Tel: +66-36-538-190 Fax: +66-36-537-919
Website: sandenintercool.com
info@sandenintercool.com

Showroom (Yommarat)
Sanden Intercool (Thailand) Public Company Limited
Tel: +662-281-8694, 282-5394, 282-8527 Fax: +662-281-8739

Central Region Sales Office (Rangsit)
Sanden Intercool (Thailand) Public Company Limited
Tel: +662-516-1565-70 Fax: +662-516-8800

Northern Region Sales Office
Sanden Intercool (Chiang Mai) Co., Ltd.
Tel: +66-53-880-848, 880-849 Fax: +66-53-855-080

Northeast Region Sales Office
Sanden Intercool (Khon Kaen) Co., Ltd.
Tel: +66-85-680-7592-94 Fax: +66-88-339-4545

Southern Region Sales Office
Sanden Intercool (Surat Thani) Co., Ltd.

ASIA PACIFIC

Australia
Sanden International (Australia) Pty. Ltd.
Tel: +61-2-9791-0999 info@sanden.com.au

Indonesia
PT. SANDEN INTERCOOL SALES INDONESIA

Malaysia
Sanden Intercool (Malaysia) Sdn Bhd
Tel: +603-8079.1922 / 1363 / 1373 info@sandenintercool.com.my

Philippine
Automotive Air-Conditioning Technology
Tel: +6349.549.7957-59 info@sanden.com.ph

Singapore
Sanden Intercool (Singapore) Pte. Ltd.
Tel: +65-6799-9111 info@sandenintercool.com

Singapore
Temp-Frost Pte Ltd.
Tel: +65-6799-1111 enquiry@tempfrost.com

Sri Lanka
Elite-R (Pvt) Ltd.
Tel: +94-114-215-856 eliter@sltnet.lk

Vietnam
Sanden Vietnam Cool Equipment Corporation
Tel: +848-3844-1474 info@sandenintercool.com.vn

MIDDLE EAST & AFRICA

Bahrain
Songserm MENA W.L.L.
Tel: +973-1773-7871 info@sandenintercool.com.bh

Egypt
Sanden Intercool (Egypt) S.A.E.
Tel: +20-2-3831-1227 - 8 info@sandenintercool.com

Kenya
Sanden Intercool (Kenya) Ltd.
Tel: +254-727-726336/ +254-733-726336
info@sandenintercool.co.ke

Nigeria
Sanden Intercool (Nigeria) Ltd.
Tel: +234-01-628-0510 sales@sandenintercool.com.ng

Saudi Arabia
Sanden Intercool (Saudi Arabia) L.L.C
Tel: +966-53-158-5175 info@sandenintercool.com.bh

South Africa
Songserm Intercool Africa (PTY) Ltd.
Tel: +27-71-1225-5614 info@sandenintercool.com.sa

EUROPE & AMERICAS

Greece
Intercool Greece Ltd.
Tel: +30-261-064-0844 info@intercool.com.gr

Hungary
Intercool Hungary Ltd.
Tel: +36-209-438-364 info@intercool.com

Italy
Sanden Intercool (Italy) s.r.l.
Tel: +39-345 612 5726 info@sandenintercool.it

U.S.A.
Innovative Display Work, Inc.
Tel: +1-909-447-8254 info@idw-usa.com



081338999983



www.sandenintercool.com

The content of this catalog are subject to change without prior notice for improvement of product fuction and exterior looks

for more information, please contact us:



UD. SUMBER REJEKI (balicoolers.com)

THE BEST PROVIDER FOR YOUR REFRIGERATION AND KITCHEN EQUIPMENT

HEAD OFFICE AND SHOWROOM

Jl. Gatot Subroto Barat No. 439 Denpasar Bali

081338999983 (HP / WA / SMS)

sumberrejekibali@gmail.com

balicoolers@gmail.com

info@balicoolers.com