





One Stop Supply Commercial
Refrigeration & Medical
Refrigeration

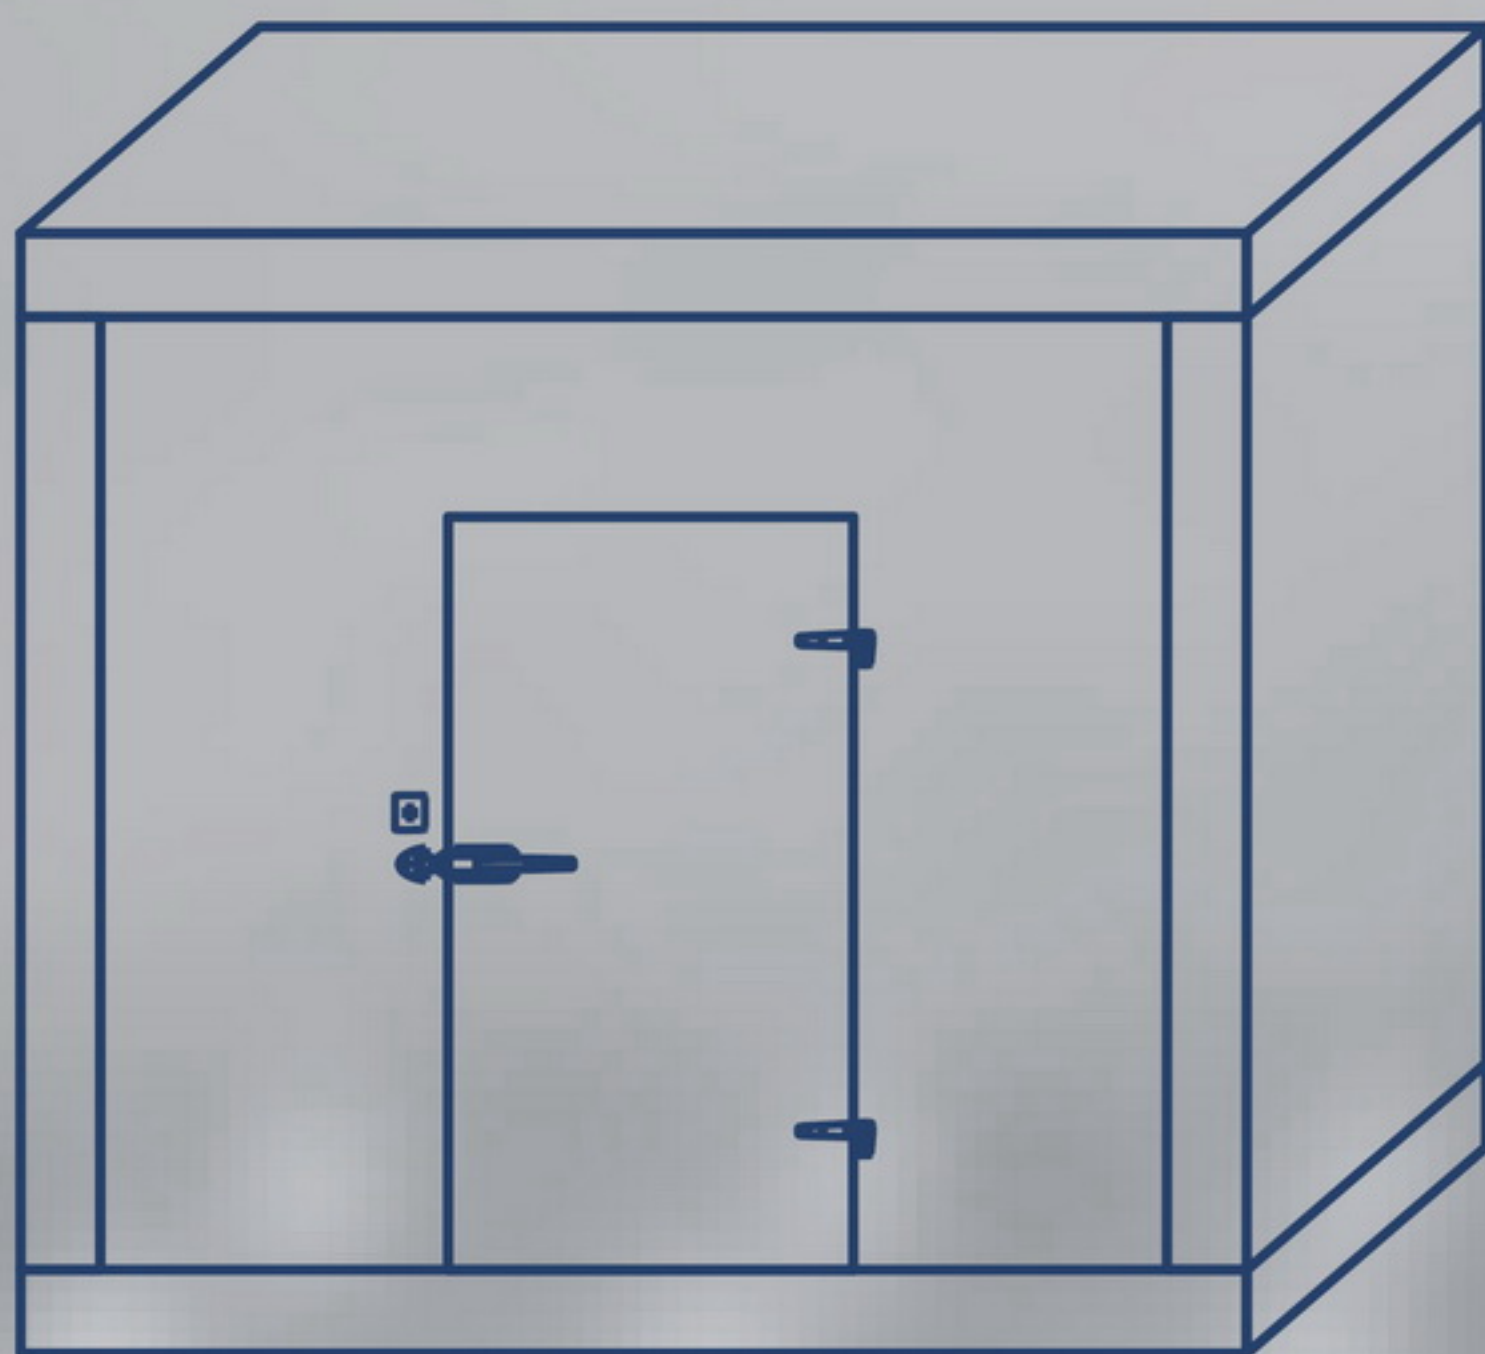

Cold Room

Product Catalogue



Blast Freezer Cold Room



Coldroom yang diaplikasikan untuk membekukan produk dengan waktu tertentu sesuai temperatur produk ketika masuk.
Aplikasi : Membekukan Ikan, Daging, Buah, Sayur, dan bahan Lain
Temperatur produk bagian tengah mencapai -15 hingga -18°C,
Blast Freezing Room Temperature -35 to -40°C



- Unit Features
- PU Panel 150mm with double layer 0.5mm color steel; density 42kg/M3;
 - Refrigerant R-404A
 - Double Stage Screw Compressor
 - Water Cooling Use Cooling Tower
 - PLC program with touchscreen Controller
 - Voltage 3 phase (380V/50Hz)



COOLING TOWER

- Model : LXT-60
- Power capacity 1.5kw
- Includes cooling water pump Model GD80-21 Power capacity 4kw



CONDENSING UNIT



EVAPOPARTOR



STORAGE CAPACITY	ROOM SIZE (cm)			DOOR SIZE (cm)	TOTAL POWER INPUT (KW)	COMPRESSOR Germany-Bitzer	MAX DIST. EVAP to MACHINE	FREEZING TIME (Base on Initial Product Temp.) (hours)				
	L	W	H									
5 Ton	700	610	300	100x200	108,2	Screw Type HSN8571-125	8 Meter	6 ~ 8	12 ~ 14			
	810	360	300		69,4	Screw Type HSN7471-75	8 Meter	10 ~ 12	18 ~ 20			
	810	360	300		61,5	Screw Type HSN7451-60	8 Meter	12 ~ 14	21 ~ 23			

*) Installation Fee : 15% from price list





Walk In Display Cooler

Remote
Condensing Unit



Kabinet yang berfungsi ganda disamping sebagai tempat pemajangan minuman dingin juga berfungsi sebagai tempat penyimpanan/gudang pada convenience store.



Cold room features

- PU thickness 100 mm with camlock system
- 180x70 swing door
- Interior light 1 set
- Plastic curtain for cold room & shelves separated
- Temperature: +3~+8°C
- Refrigerant: R404a
- Price tag

Glass door features

- 2 layers tempered glass with heating
- 7 layer shelving
- Frame heater
- Long handle door
- LED light
- Automatic closing door

TWQ-G6H

TYPE	DIMENSION (cm)			D pcs	DISPLAY AREA	CDU UNIT		EVAP TYPE	POWER
	L	W	H			TYPE	HP		
TWQ-3G6H	239,5	225	230	3	4,16 m ²	LUHP-015	1,5	DEC-10	2000W
TWQ-4G6H	312	225	230	4	5,54 m ²	LUHP-025B	2,5	DL20	2000W
TWQ-5G6H	385	225	230	5	6,9 m ²	LUHP-025B	2,5	DL20	2000W

*) Installation Fee: 20% from price list

